FAGOR 8035 CNC





Unmatched operating ease with so many features

The FAGOR 8035 CNC, thanks to its operating ease and its numerous features, is the ideal CNC for 3-axis milling machines and machining centers as well 2-axis lathes and other kinds of machines (engraving, routers, Oxicutting, etc.).

It's operating ease makes the operator's job easier; the screen offers the operator all the necessary information: axis position and feedrate, spindle speed, selected tool, etc.

This CNC is available in twelve languages: English, Spanish, Portuguese, Chinese, Russian, French, Italian, German, Dutch, Czech, Polish and Basque.



ISO language programming

The FAGOR 8035 CNC is programmed in ISO language, it offers an interactive canned cycle editor, Teach-in editing, tool inspection, etc.


The "T" model for lathes and the "M" model for milling models and machining centers come with ten canned cycles and all the specific operations your machine needs.



Interactive editor for canned cycles

It is a dialog-based guided editing method. The CNC guides the operator through the help screens that request the data for the selected operation. No expert ISO programming knowledge is required, just the basics.

The quality of the generated programs is excellent. This editing method only lets enter the requested data, thus being impossible to generate wrong or incomplete blocks.

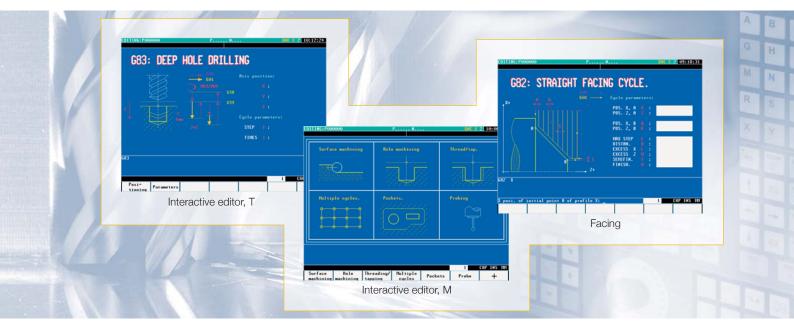



Teach-in editing

It is an interactive mode that allows the CNC to operate as a manual machine. To program the coordinates, just jog the machine with the JOG keys or with the electronic handwheel to the desired position and press the key of the axis or axes to be programmed. The CNC generates a block to move to that position.





Tool Inspection

Tool inspection makes the operator's job easier allowing him to move the axes after interrupting the program, to check tool status, replace it if necessary and resume the program after repositioning the axes.

The new selected tool needs not be identical to the previous one; if another tool of different characteristics is selected, the CNC recalculates the next machining operation according to the new tool.

Likewise, activating the MDI mode during tool inspection and executing any M, S or T function makes it possible to adapt the machining functions to the new tool.



Great memory capacity

It has a 256 KB RAM memory for editing and executing part-programs and it may be expanded up to 1 MB. It also has a 128 MB compact flash memory for storing user programs, the CNC configuration and the PLC program.



USB connector

The USB connector may be used to upload and download part-programs, tables and parameters from/to an external memory device.



Working with CAD-CAM

For those who use CAD-CAM, the 8035 CNC converts and executes, through WIN DNC, files and profiles generated in DXF format.



Program compatibility

The WINDNC application may be used to run at the 8035 CNC programs that were edited at older CNC models 8000, 8010 and 8025.



Thread cutting operations

On lathe models, besides the typical turning operations (turning, grooving, facing, etc.), it is possible to make all kinds of threads: longitudinal, taper, on the face, with variable pitch, etc. Multiple-entry (multi-start) threads can also be defined.


The thread repair function offered by the 8035 CNC is ideal for restoring parts having worn out threads.



Retrace function

It makes it possible to interrupt a machining operation and withdraw the tool following the same machining path backwards. It is very useful in applications that due to the way machining is done do not allow any other way to withdraw the tool: EDM, laser cutting, plasma cutting, etc.

This feature prevents possible damage to the part or having to perform complex operations to withdraw the tool.

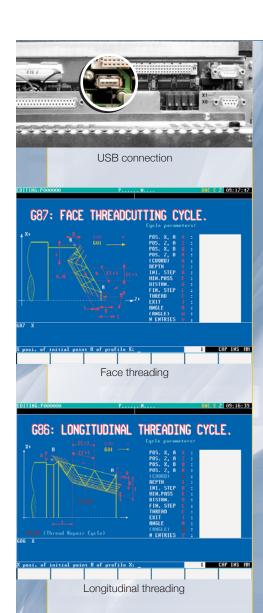





- >>> For lathes and turning centers
- >>> For 2 axes and 1 spindle
- >> MM and inch programming
- >>> Cartesian and Polar coordinate programming
- >> Home search
- >>> Spindle rpm and Constant Surface Speed (CSS)
- >>> Linear and circular interpolation
- >>> Electronic threading and variable-pitch threads
- >>> Preparatory functions: Mirror image and scaling factor
- >> Tool compensation (length, shape of the cutter and nose radius)
- >>> Probing
- >> Machining canned cycles:
 - >> Pattern repeat
 - >> Roughing along the X axis
 - >>> Roughing along the Z axis
 - Turning of straight sectionsFacing of straight sections
 - >> Axial drilling and tapping

- >>> Turning of arcs
- >>> Facing of arcs
- >> Longitudinal threading
- >> Face threading
- >> Grooving along the X axis
- >>> Grooving along the Z axis

FAGOR **8035 M**ene

- >>> For milling machines and machining Centers
- >>> For 3 axes and 1 spindle
- >> MM and inch programming
- >>> Programming in Cartesian, Polar or cylindrical coordinates
- >> Home search
- >>> Linear, circular and helical interpolation
- >> Electronic threading and variable-pitch threads
- >>> Preparatory functions: Mirror image, scaling factor, pattern rotation
- >> Tool radius and length compensation
- >>> Collision detection
- >> Probing
- >>> Retracing function
- >>> Machining canned cycles:
 - >> Drilling with dwell
 - >>> Deep hole drilling with constant peck
 - >> Variable-peck deep hole drilling
 - >> Boring with rapid withdrawal
 - >> Boring with withdrawal at working feedrate
- >> Multiple machining
 - >> In a circular pattern
 - >> In an arc
 - >> Programmed using an arc-chord

- >>> Drilling
- >>> Tapping
- >> Reaming
- >> Circular pocket
- >>> Rectangular pocket
- >> In a straight line
- >> In a parallelogram pattern
- >> In a grid pattern

G88: CIRCUL	AR POCKET	BK E 2 10:11:2
÷-	- 500	IUS J:
Posi- tioning Parameters	l l	1 CEP 185 H
650: Line	651: Rectangle	662: Grid
663: Circle	661: fire	GGS: Chard

Models

Lathe				
Configuration	Sales Reference			
Monochrome LCD	CNC 8035 T MON			
Color LCD	CNC 8035 T COL			
Color LCD an CAN Connection	CNC 8035 T COL CAN			

Mill				
Configuration	Sales Reference			
Monchrome LCD	CNC 8035 M MON			
Monochrome LCD plus Retracing function	CNC 8035 M MON R			
Color LCD	CNC 8035 M COL			
Color LCD, Retracing function	CNC 8035 M COL R			
Color LCD, Retracing function, Ethernet and CAN	CNC 8035 M COL R CAN			

General Characteristics


CONFIGURATION	8035	
Full alphanumeric keyboard	•	
Configurable keys	12	
Manageable tools	255	
User memory (RAM)		
User memory (RAM)	256 K	
	▲ 1 MB	
KEYCF (Compact Flash)	128 MB	
Communication		
RS 232 (up to 115.200 Bd)	•	
DNC	•	
Ethernet 100 Mhz T base	A	
USB for program backup	•	
Axis adjustment		
Feed forward / AC Forward	•	
75-block Look ahead	•	
System architecture	<u>'</u>	
Hardware configuration	Central unit integrated into the monitor	
Monitor	▲ 7.5" Monochrome LCD	
	▲ 7.5" Color LCD	
Feedback inputs	4 for axes and spindle	
- Spindle: TTL and differential TTL - Axes: Vpp, TTL and differential TTL	 2 specific for electronic handwheels 	
Analog inputs (±10 V)	4 for axes and spindle	
Probe inputs, 5 V (0.25mA) or 24V (0.3mA)	• 2	
Digital inputs and outputs (150 mA)	• 40 I / 24 O	
CAN for digital connection with the drives	A	
Processing time		
Block processing time	12 ms	
Minimum position loop	4 ms	
PLC cycle time (ms / 1,000 instructions)	3	
Servo Drive Systems		
Analog	•	
Digital CAN (for ACSD / SPD drives)	A	


● Standard ▲ Option


FEATURES	M	Т
Spindle		
Spindle orientation M19	•	•
Interpolation		
Linear, Circular, Helical	•	•
Retrace function	A	-
Compensations		
Tool length and radius	•	•
Tool geometry	-	•
Graphics		
Tool path	•	•
3 simultaneous views (with depth simulation)	•	-
Operation related		
Simulation with execution time estimate	•	•
Look-ahead of N blocks to avoid tool collision	•	•
Programming related functions		
Feedrate as an inverted function of time	•	•
Canned cycles		
Machining canned cycles	•	•
Multiple-positioning canned cycles	•	-
Tool radius compensation	•	•
Setup assistance	•	•
Rigid Tapping	•	•

● Standard ▲ Option - Not available









Backed by a worldwide leader group

FAGOR AUTOMATION has been manufacturing measuring and control systems for machine-tools for over 25 years and excels by guaranteeing the most complete and competitive range of CNC's, servo drive systems, DRO's and feedback systems.

FAGOR AUTOMATION exports over 79% of its total production to the industrialized world through a significant distribution network worldwide (more than 24 branch offices in 15 countries). All this with a matchless after-sales service.

FAGOR AUTOMATION is part of Mondragón Cooperative Corporation, one of the most important European corporations, with more than 160 companies and more than 80,000 employees in three divisions: Financial, Distribution and Industrial. The industrial division FAGOR AUTOMATION belongs to covers a wide range of industrial sectors and it occupies leading positions in all of them.

FAGOR AUTOMATION shall not be held responsible for any printing or transcribing errors in the catalog and reserves the right to make changes to the characteristics of its products without prior notice.

Fagor Automation S. Coop. (Mondragón)

B° San Andrés, 19 – Apdo. 144 E-20500 Arrasate-Mondragón, Spain Tel. 34 943 719 200/34 943 039 800

Fax: 34 943 791 712

E-mail: info@fagorautomation.es www.fagorautomation.com

Fagor Automation S. Coop. (Usurbil)

B° San Esteban, s/n – Txoko Alde E-20170 Usurbil, Spain

Tel. 34 943 000 690 Fax: 34 943 360 527

E-mail: usurbil@fagorautomation.es



AENOR

ER-073/1994

Fagor Automation Catalunya (Barcelona-Spain) Tel. 34 934 744 375 Fax: 34 934 744 327

FAGOR AUTOMATION GmbH (Göppingen-Germany) Tel. 49 7161 15 685-0 Fax: 49 7161 15 685 79

Fagor Italia S.R.L. (Milano-Italy) Tel. 39 0295 301 290 Fax: 39 0295 301 298

Fagor Automation Ltda. (Leça da Palmeira-Portugal) Tel. 351 229 968 865 Fax: 351 229 960 719

Fagor Automation UK Ltd. (West Midlands-United Kingdom) Tel. 44 1327 300067 Fax: 44 1327 300880

Fagor Automation France S.à.r.I.(Clermont Ferrand-France) Tel. 33 473 277 916 Fax: 33 473 150 289

Fagor Automation (Asia) Ltd. (Hong Kong) Tel. 852 23 89 16 63 Fax: 852 23 89 50 86

Fagor Automation Taiwan Co., LTD. (Taichung-Taiwan) Tel. 886 4 23851558 Fax: 886 4 23851598

Fagor Automation (S) Pte. Ltd. (Singapore)
Tel. 65 68417345 / 65 68417346 Fax: 65 68417348

Fagor Automation (M) SDN.BHD. (Malaysia) Tel: 60 3 8062 2858 Fax: 60 3 8062 3858

Beijing Fagor Automation Equipment Co., Ltd. (Beijing-China) Tel: 86 10 84505858 Fax: 86 10 84505860

Beijing Fagor Automation Equipment Ltd. (Nanjing- China) Tel. 86 25 8332 82 59 Fax: 86 25 8332 82 60

Beijing Fagor Automation Equipment Co., Ltd. (Chengdu-China) Tel. 86 28 66 13 20 81 Fax: 86 28 66 13 20 82

Beijing Fagor Automation Equipment Co., Ltd. (Guangzhou-China) Tel. 86 20 86 55 31 24 Fax: 86 20 86 55 31 25

Beijing Fagor Automation Equipment Co., Ltd (Shanghai- China) Tel: 86 21 63 53 90 07 Fax: 86 21 63 53 88 40

Fagor Automation Korea, Ltd. (Seoul-Korea)
Tel. 82 2 2113 0341 / 2113 0342 Fax: 82 2 2113 0343

Fagor Automation do Brasil Com. Imp. Exp. Ltda. (São Paulo-Brasil) Tel. 55 11 56 94 08 22 Fax: 55 11 56 81 62 71

Fagor Automation Corp. (Chicago-USA) Tel. 1 847 98 11 500 Fax: 1 847 98 11 311

Fagor Automation West Coast (California-USA) Tel. 1 714 957 98 85 Fax: 1 714 957 98 91

Fagor Automation East Coast (New Jersey-USA) Tel. 1 973 773 35 25 Fax: 1 973 773 35 26

Fagor Automation Ohio Branch (USA)
Tel. 1 614 855 5720 Fax: 1 614 855 5928

Fagor Automation South East (Florida – USA) Tel. 1 813 654 45 99 Tel. 1 813 654 33 87

Fagor Automation Ontario (Mississauga-Canada) Tel. 1 905 670 74 48 Fax: 1 905 670 74 49

Fagor Automation Quebec (Montreal-Canada) Tel. 1 450 227 05 88 Fax: 1 450 227 61 32

Fagor Automation Windsor (Canada)
Tel. 1 519 944 56 74 Fax: 1 519 944 23 69

FAGOR AUTOMATION holds the ISO 9001 Quality System Certificate and the $\pmb{\zeta}$ Certificate for all its products.



